

FIREFLY OASIS MCF G31M

PREMIUM DUAL-PURPOSE
BATTERY



DUAL PURPOSE. ONE BATTERY.
STARTING POWER + AUXILIARY POWER



KEY BENEFITS



DUAL-PURPOSE PERFORMANCE

Delivers strong starting power and reliable auxiliary power in one battery.



DEEP-CYCLE DURABILITY

Built for repeated cycling and demanding mixed-duty applications.



BUILT TO LAST
Resists sulfation, vibration, heat, and demanding conditions for longer service life.



REDUCE DOWNTIME
Faster recharge and better reliability help keep your fleet moving and your business on schedule.



WORKS IN HOT & COLD CONDITIONS

Reliable performance in extreme temperatures.

BUILT FOR EVERY JOURNEY



Reliable power for long hauls and heavy-duty demands.



Dependable energy for all your marine adventures.



Comfort and confidence for life on the road.



HIGH VIBRATION RESISTANCE

Performs reliably even in tough road conditions.



MAINTENANCE FREE

Hassle-free performance you can count on.



SAFE & RELIABLE DESIGN

Engineered with safety and durability in mind.



LONG LASTING PERFORMANCE

Built to deliver consistent power for longer.

**RELIABLE POWER.
EVERY MILE. EVERY TIME.**

Built with advanced Microcell™ Carbon Foam technology, Firefly OASIS MCF G31M delivers the perfect balance of starting power and auxiliary loads performance for today's marine systems.

12V G31M BATTERY

(VRLA AGM GEL)


OASIS™

Partial state of charge cycling Efficiency	Ampere-hour >97% & watt hour >90%
Nominal Voltage	12V
Maximum charge voltage	14.10V
Maximum charge current	0.5C Amps for continuous charge
	1C Amps can be tolerated for Sporadic sessions.
Internal resistance	5.0 mΩ
Shelf life@25°C(77°F)	2 years
Self- Discharge	<2% per Month @ 25°C
CCA	630 Amps
Reserve Capacity	215 min

Temperature	Low	High
Operation	-20°C/-4°F	50°C/122°F
Storage	-30°C/-22°F	60°C/140°F

Weights & Dimensions	
Length	13.77in/350mm
Width	6.8in/171mm
Height	8.6in/218 mm
Weight	69.5lbs/31.5kgs
Volume	807Cu.in/12.3liters
Construction	
Terminal configuration	3/8 “-16 UNC
Case/Cover	ABS
Racks	Available upon request

Charge Temperature CompensationCharge Temperature Compensation					
Operating Temperature	°C	-20	25	40	55
	°F	-4	77	104	131
Absorption Charge Voltage	v	15.3	14.1	13.8	13.5

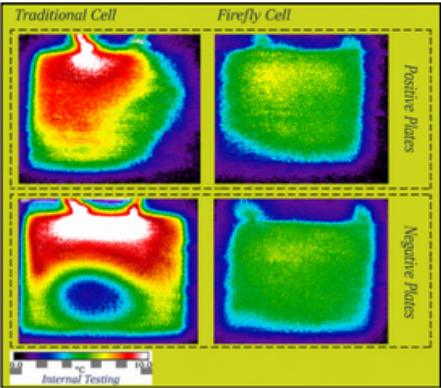

Infrared thermal images snapped at the end of a 5C (12 minute) discharge of both a Firefly 3D cell and a Traditional cell.

More uniform temperature distribution, as the Carbon Foam is thermally conductive, results in

- Uniform current density distribution.
- Higher overall active material utilization.
- Less localized positive grid corrosion.
- Less localized positive active material wear out.

Discharge Rates to 1.75V Per Cell*			
Hours	Amps	Ah	Kwh
0.25	155	38.8	0.47
1	63	63	0.76
3	26.7	80	0.96
5	17.4	87	1.04
10	10	100	1.2
20	5.25	105	1.26

Battery Life *	
DOD(%)	Cycles
30	7500-11250
50	3000-3500
65	1500-2000
80	850-1100
100	500-700
*All above are at 25°C/77°F	

International Compliance
ISO 9001:2015
IS 15549:2005
IEC 60896 -21/22 :2004
IEC 62040 - 1/2
IEC 61427
IEC 60095
IEC 61056
UL 1778 / 1973 / 1978